

Mayfair Flags

Granite aggregate paving slabs.

Mayfair flags have a sophisticated, modern feel. Manufactured with natural granite aggregates, Mayfair flags have a hard-wearing, durable surface and come in five natural colours.

- Manufactured with natural granite aggregates
- Superb hard-wearing granite surface
- Vibrant long-lasting colours
- Creates a striking, contemporary look

 **PrimeTop**  **Ef-Stop**  **EasyClean**

TGA

Textured
Granite Aggregate

Finish



Steps

Also available as



Pedestrian
Use



Light
Traffic



Commercial
Traffic




BIM
Level 2

Refer to relevant guidance in BS 7533




SCAN HERE

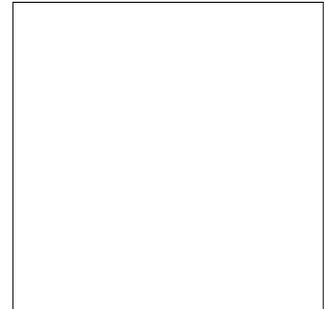


600 x 600mm



600 x 400mm



450 x 450mm



400 x 400mm

Sizes



50mm
40mm
35mm

Depths

Mayfair Flags



Specification

 **PrimeTop**  **Ef-Stop**

Product type	Concrete Paving Flag			
Manufactured to	BS EN 1339:2003			
Surface Layer	Hard-wearing surface layer with a minimum of 4mm and >390kgs/m ³ cement			
Granite content	Not less than 57% of granite aggregate in surface layer for Silver and Graphite; Not less than 46% of granite aggregate in surface layer for Sandstone			
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence			
Strength	Less than 50mm deep Typical tensile splitting strength of >3.5MPa 50mm or greater Typical tensile splitting strength of >5MPa (Class 3)			
Slip/Skid risk	Extremely Low			
Installed to	BS 7533-4:2006			
BS	Plus Q25 315 Create 45-20-64/395			
Tolerances on Dimensions (mm)	Length ±2mm, width ±2mm, thickness ±3mm			
Abrasion Resistance	Class 3			
Durability (Freeze-thaw)	Class 3			
External Fire Performance	Deemed to satisfy. See Commission Decision 2000/553/EC			
Reaction to fire	Class A1			
Applications	Refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from www.bsigroup.com			
Energy used	100% renewable energy			
Water used	100% from our rainwater harvesting system and groundwater bore hole			
Recycled content	Not less than 6%			
Carbon Footprint		35mm	40mm	50mm
	Silver	14*	16*	19*
	Sandstone	15*	17*	22*
	Graphite	15*	17*	24*
Recyclable	100% of this product can be recycled			
Manufacturing & Delivery	From one location within the UK			
breem rating www.bre.co.uk	A , according to the Green Guide to Specification, 4 th Edition 2009. A+ , can be achieved by using a recycled sub-base.			

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

Contact Us


GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk

tobermore.co.uk

Mayfair Flags

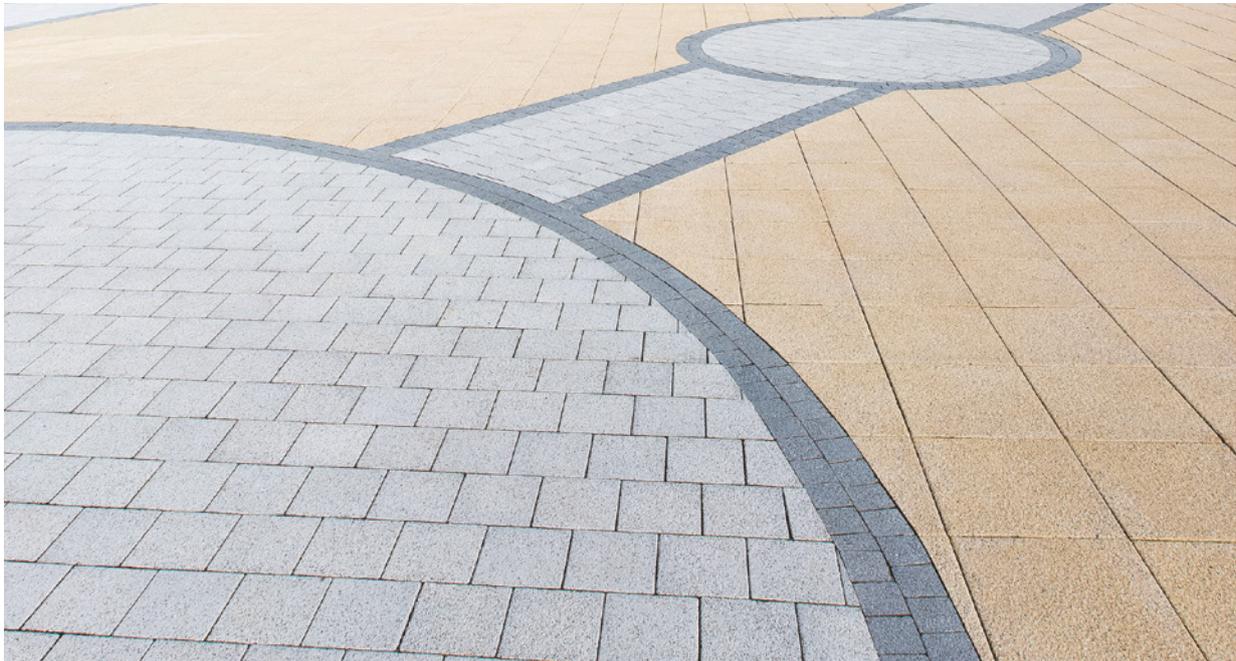
Silver

Graphite

Sandstone


Stock

product	size (mm)	finish	edge	colours available	in stock	no. per m ²	no. per pack	no. per pallet	weight kg per pack GB	weight kg per pack NI/ROI
Mayfair Flags BIM	600 x 600 x 50	Granite Textured	Chamfered	Graphite, Sandstone, Silver	YES	2.78	20	20	859	851
	600 x 400 x 50	Granite Textured	Chamfered	Graphite, Sandstone, Silver	YES	4.16	20	40	584	580
	450 x 450 x 50	Granite Textured	Chamfered	Graphite, Sandstone, Silver	YES	4.94	20	80	470	466
	450 x 450 x 35	Granite Textured	Chamfered	Graphite, Sandstone, Silver	YES	4.94	30	120	529	525
	400 x 400 x 40	Granite Textured	Chamfered	Graphite, Sandstone, Silver	YES	6.25	25	100	384	382

BIM - This product is available to download from our website in BIM Level 2 format.

Contact Us

GB: 0844 800 5736
 NI: 028 7964 2411
 ROI: 048 7964 2411

Email

technical@tobermore.co.uk
 sales@tobermore.co.uk

tobermore.co.uk