


Hot Dip Galvanized Finish 50mm (45mm recess)

Galco Steel range of Hot Dip Galvanized covers, Our recess covers are manufactured using only quality-approved mild steel with structural welded joints and integrated lifting eyes.

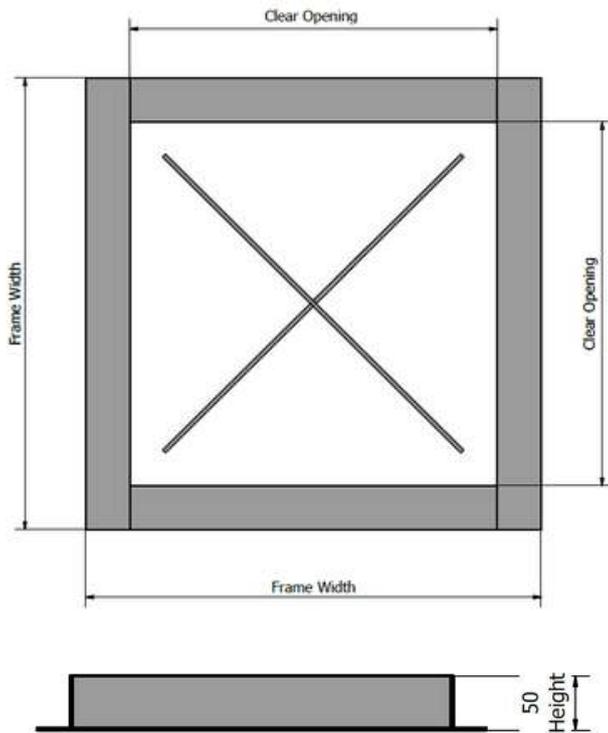

Facta Class	EN124 Class	GLW	Wheel Loads		Typical Applications	
		Gross Laden Vehicle Weight (slow moving)	Wheel Loads* (slow moving) Pneumatic	Wheel Loads* (slow moving) Solid	Pneumatic Tyres	Solid Tyres
AA 	A15	5 tonne	1.5 tonne (15kN)	N/A	Internal and external pedestrian areas i.e. toilets, changing rooms, footways and cycle tracks Very light industrial areas, where small trolleys and private cars/vans can manoeuvre i.e. domestic driveways, trolley parks, underground car parks	

Features

- This recess cover will accommodate paving up to 30 mm or concrete in-fill up to 45 mm
- Manufactured to FACTA standard and ISO 9001 2015 factory production control

Code	Clear Opening (mm)	Frame Width (mm)	Height (mm)	Recess Depth Total (mm)	Bracing (LxWxH in mm)
2RGL050L	300 x 300	410 x 410	50	45	
5RGL050L	457 x 457	567 x 567	50	45	375 x 375 x 40
7RGL050L	600 x 600	710 x 710	50	45	505 x 505 x 40