



EQC

Euro Quality Cladding

SEAMLAP®

Standing Seam Metal Roof Solution


SEAMLAP®

Irish manufactured
—
Secret fix
—
Choice of colours
—
Flashings to suit
—


PRODUCT INFORMATION

Seamlap® is a sustainable prefinished steel standing-seam roof and cladding system where the sheets click together to deliver an attractive visual finish with hidden fixings.

Suitable for low-pitch (5° minimum) and cold-roof application, Seamlap® sheeting must be supported on either 18mm plywood or OSB deck, overlaid with suitable breather membrane.

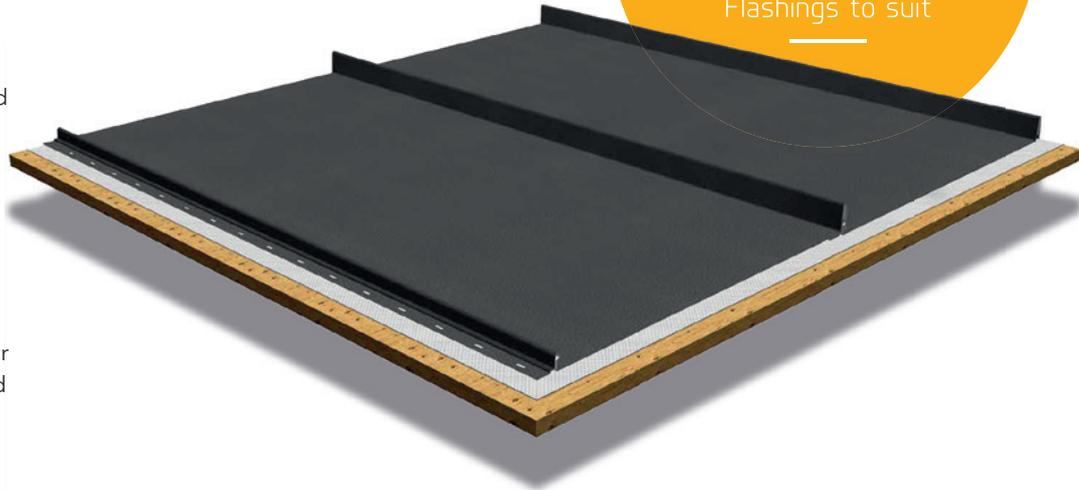


PROFILE

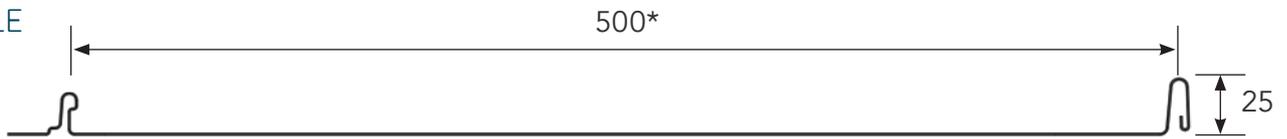

INSTALLATION PROCEDURE

1
The underlap edge of the sheet is fixed to the timber substrate through the pre-punched strip using stainless steel screws.

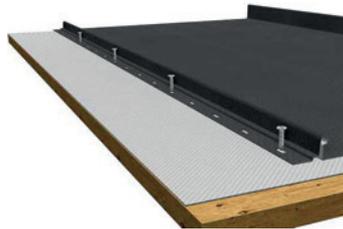

2
The overlap of the subsequent sheet click into place, and forms the side-lap joint.



PRODUCT PARAMETERS

MANUFACTURING

| | |
|----------------|--------------|
| Maximum length | 10 metres |
| Minimum length | 1 metre |
| Curving | Not suitable |

COLOUR FINISH

| | |
|-------------------|---|
| Colorcoat Prisma® | Anthracite, Slate Grey, Black |
| Colorcoat® LG | Merlin Grey, Goosewing Grey, Raven, Anthracite, Black |

MATERIALS: TATA STEEL COLORCOAT® 0.7MM PRE-FINISHED STEEL

| | |
|-------------------|-------------------|
| Colorcoat Prisma® | 500mm cover width |
| Colorcoat® LG | 500mm cover width |

- Cover widths from 200mm up to 500mm can be manufactured based on the application and priced accordingly.
- Seamlap® installation guide supplied.
- The long term performance of Tata Steel Colorcoat® pre-finished steel demonstrated with BBA certification.
- Available with the 25 year Confidex® Home Guarantee upon registration when using Colorcoat HPS200 Ultra® or Colorcoat Prisma® on the roof and/or wall of residential dwellings.

